

The **series MT-HPI winches**, a multifunctional winch, suitable for many applications

Standard build with hydraulic drive and high quality industrial planetary gearbox. Available in many varieties in pulling or lifting applications We are able to offer you many options as listed below. Below types are a small and general spectrum of what we can offer in these types of winches. Please inform us your requirement.



Standard features

- High quality industrial planetary gearbox
- Oil filled
- 2-component paint system 150µm RAL 5002

Available options

- Various motor options
- Grooved drum
- Drum guard
- Pressure roller
- Slack wire switch
- Wire rope
- Alternative dimensions / speeds
- Alternative pulling forces

Available controls

- Proportional local or remote control valve

With the MT-HPI series, Marotechniek adds a powerful branch to its winch family suitable for a wide variety of applications.

MaRo Techniek

Hoge Balver 15 | 7207BR Zutphen | The Netherlands
Phone: +31 (0)575-538470 | Fax: +31 (0)575-538471
e-mail: info@marotechniek.nl

www.marotechniek.nl



Electric winches MT-HPI

The Series MT-HPI winches is available in various frame sizes


Winch type	W.L.L.		Lift	Speed		Recomm. rope diam.	Drum cap. 5 th layer	Hydr motor	ΔP/ Flow	Weight
	1 st Layer	5 th Layer		1 st layer	5 th layer					
MT-HPI 2370	2370 kg	1750 kg	1424 kg	17 mtr/min	22 mtr/min	Ø10 mm	211 mtr	OMR80	130/42	195 kg
MT-HPI 3400	3400 kg	2470 kg	2040 kg	14 mtr/min	19 mtr/min	Ø12 mm	198 mtr	OMR80	150/42	235 kg
MT-HPI 4660	4660 kg	3350 kg	2800 kg	11 mtr/min	15 mtr/min	Ø14 mm	192 mtr	OMSS125	150/45	255 kg
MT-HPI 6100	6100 kg	4350 kg	3660 kg	9 mtr/min	13 mtr/min	Ø16 mm	189 mtr	OMSS160	150/50	340 kg
MT-HPI 7660	7660 kg	5530 kg	4600 kg	8 mtr/min	11 mtr/min	Ø18 mm	194 mtr	OMTS160	155/50	410 kg
MT-HPI 9500	9500 kg	6900 kg	5700 kg	7 mtr/min	10 mtr/min	Ø20 mm	198 mtr	OMTS160	180/50	522 kg
MT-HPI 11500	On request									
MT-HPI 13660	On request									
MT-HPI 16000	On request									
MT-HPI 18600	On request									
MT-HPI 21300	On request									

The Series MT-HPI winches is available in various sizes (dimensions in mm)

Winch type	A	B	C	D	E	F	G	H	H*	I	J	K	L	M	N	O	P
MT-HPI 2370	545	1010	458	219	110	370	110	80	-	726	85	225	500	1098	18	12	295
MT-HPI 3400	605	1010	545	244	110	430	110	80	-	726	85	225	500	1131	18	12	328
MT-HPI 4660	660	1010	600	273	110	485	108	85	-	723	85	226	500	1188	22	12	360
MT-HPI 6100	720	1060	660	305	115	545	133	85	-	763	85	259	500	1254	22	15	390
MT-HPI 7660	760	1350	700	355	115	625	170	110	-	817	95	320	500	1441	26	15	400
MT-HPI 9500	840	1450	780	406	115	710	170	110	-	817	95	325	500	1508	26	15	445
MT-HPI 11500	On request																
MT-HPI 13660	On request																
MT-HPI 16000	On request																
MT-HPI 18600	On request																
MT-HPI 21300	On request																

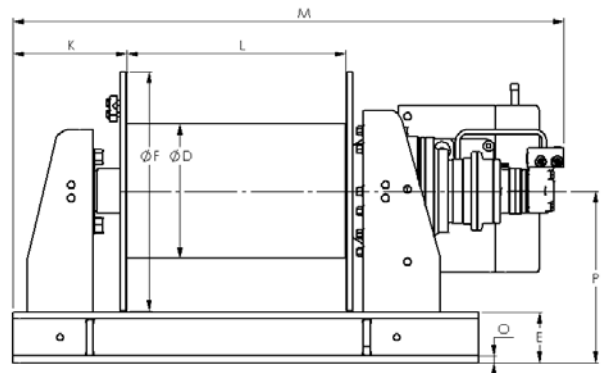

H* = Mountinghole available from 11500 kg winch and above

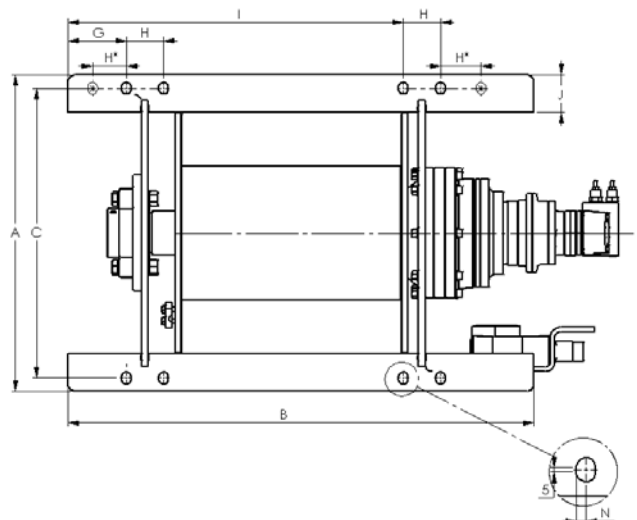

MaRo Techniek

Hoge Balver 15 | 7207BR Zutphen | The Netherlands
 Phone: +31 (0)575-538470 | Fax: +31 (0)575-538471
 e-mail: info@marotechniek.nl

www.marotechniek.nl