


# The series MT-HKB winches

## Heavy duty winches

Standard build with hydraulic drive, and high quality industrial planetary gearbox. Available in many varieties in mooring or anchoring applications We are able to offer you many options as listed below. Below types are a small and general spectrum of what we can offer in these types of winches. Please inform us your requirement.

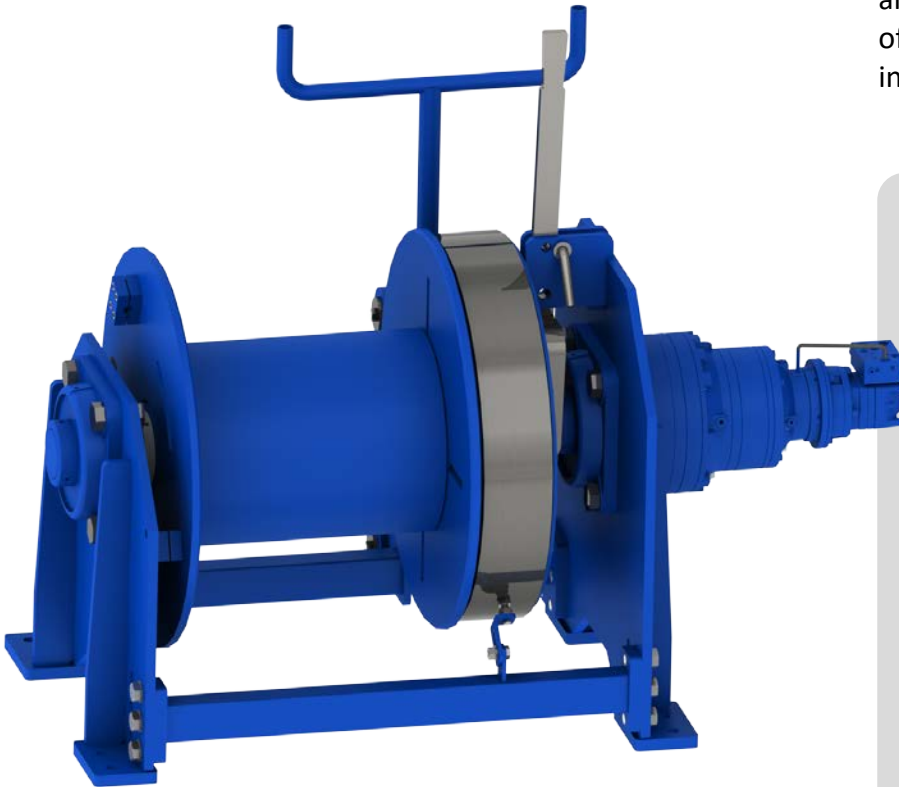

The MT-HKB winch, mooring and anchor winches suitable for your heavy duty job.

### Standard features

- High quality industrial planetary gearbox
- Band brake W.L.L. 150%
- Manual controlled band brake
- Manual controlled free spool clutch
- Oil filled
- 2-component paint system 150µm RAL 5002

### Available options

- Galvanized drum guard €
- Pressure roller
- Grooved drum
- Warping head
- Spooling gear
- Hydraulic / pneumatic controlled band brake
- Hydraulic / pneumatic controlled free spool clutch
- Wire rope
- Alternative dimensions / speeds
- Alternative band brake force
- Alternative pulling forces up to 80T

### Available control options

- Proportional local or remote control valve

**MaRo Techniek**

Hoge Balver 15 | 7207BR Zutphen | The Netherlands  
Phone: +31 (0)575-538470 | Fax: +31 (0)575-538471  
e-mail: info@marotechniek.nl

[www.marotechniek.nl](http://www.marotechniek.nl)

## Technical specifications




### The Series MT-HKB specifications

Winch type	W.L.L.		Speed		Recomm. rope diam.	Drum cap. 5 <sup>th</sup> layer	Hydr motor	ΔP/ Flow	Weight
	1 <sup>st</sup> Layer	5 <sup>th</sup> Layer	1 <sup>st</sup> layer	5 <sup>th</sup> layer					
MT-EKB 3400	3400 kg	2470 kg	11 mtr/min	16 mtr/min	Ø12 mm	198 mtr	OMR80	130/44	kg
MT-EKB 6100	6100 kg	4430 kg	9 mtr/min	13 mtr/min	Ø16 mm	195 mtr	OMR100	155/55	kg
MT-EKB 8550	8550 kg	6080 kg	9 mtr/min	13 mtr/min	Ø19 mm	185 mtr	OMSS125	155/65	kg
MT-EKB 11500	11500 kg	8150 kg	11 mtr/min	15 mtr/min	Ø22 mm	180 mtr	OMTS160	195/84	kg
MT-EKB 14000	14000 kg	9680 kg	10 mtr/min	14 mtr/min	Ø24 mm	170 mtr	OMTS250	160/115	kg
MT-EKB 18600	18600 kg	13120 kg	9 mtr/min	13 mtr/min	Ø28 mm	180 mtr	OMTS250	200/115	kg
MT-EKB 26500	26500 kg	18630 kg	9 mtr/min	12 mtr/min	Ø34 mm	180 mtr	M80	240/115	kg
MT-EKB 38000	38000 kg	26600 kg	7 mtr/min	10 mtr/min	Ø40 mm	175 mtr	M80	260/125	kg

### The Series MT-HKB dimensions (mm)

Winch type	A	B	C	D	E	F	H*	I	J	L	M	N	P	W	Y
MT-EP 1900															
MT-EP 2800															
MT-EP 3500															
MT-EP 5000															
MT-EP 6350															
MT-EP 7850															
MT-EP 9750															
MT-EP 11500															

Dimensions on request

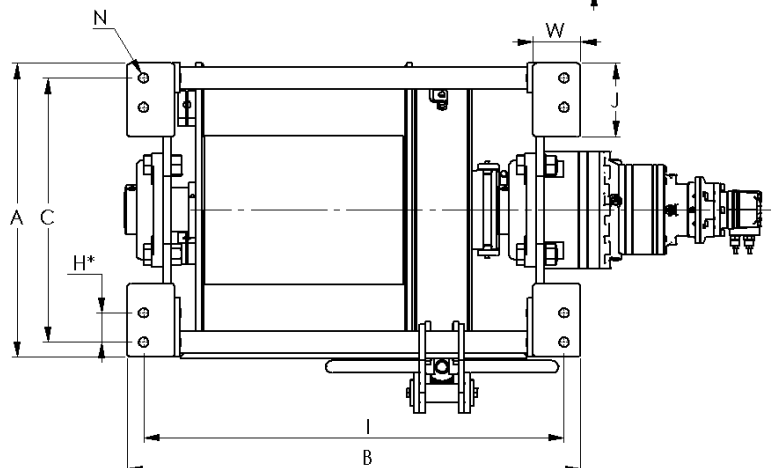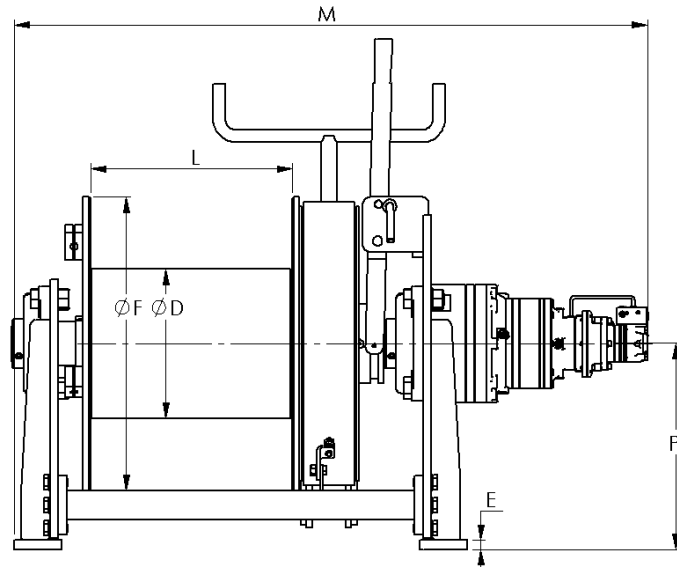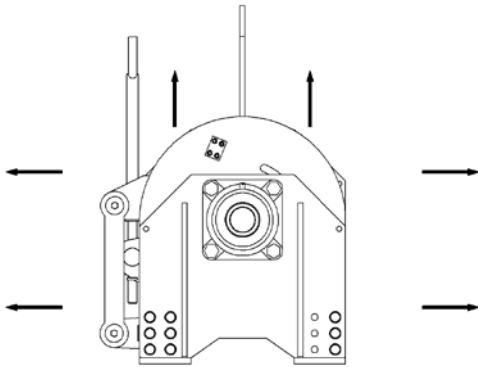

**MaRo Techniek**

Hoge Balver 15 | 7207BR Zutphen | The Netherlands  
 Phone: +31 (0)575-538470 | Fax: +31 (0)575-538471  
 e-mail: info@marotechniek.nl

[www.marotechniek.nl](http://www.marotechniek.nl)